


LG350FC

Batch Dispense Peristaltic Pump

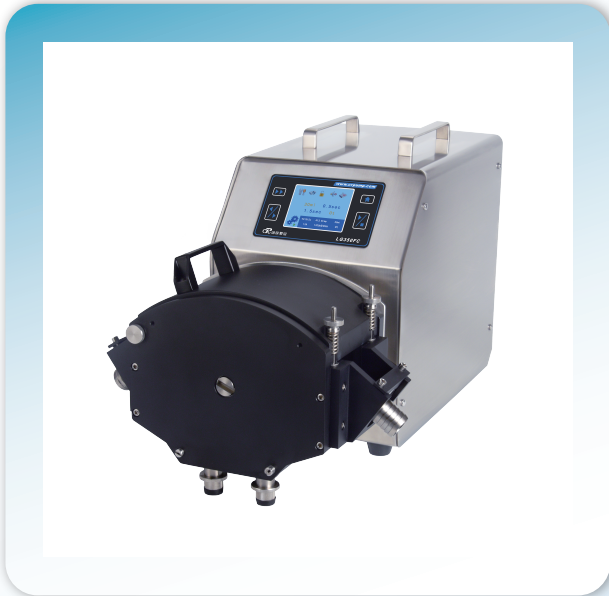

Used in food industry, fluidized bed liquid supply, liquid medicine filtration, photovoltaic, chemical industry and other fields


- It has two working modes of transmission and distribution, and can perform repeated timing and quantitative filling.
- 3.5-inch color LCD, Chinese and English display, touch screen control.
- Can automatically save the control parameters when the last power failure.
- Compatible with KZ50 pump head, the maximum transmission flow can reach 33L/min.
- 9 sets of data can be stored for users.
- Support RS485/MODBUS communication protocol, analog control, foot switch control.

Max Flow: 33000mL/min

Max speed : 350rpm

Pump head/tube flow parameter table

Note: The test environment for flow data is normal temperature and pressure, and the test fluid is water. The values are for reference only, please refer to the actual situation.

Pump head	Model	Tube	ID (mm)	Wall thickness (mm)	Max flow (mL/min)	Max speed (rpm)
	KZ50	92#	25.4	4.8	33000	350

* For specific needs, please consult Chuangrui Company.

Flow unit:(mL/min) Tube:(mm)